










Steel plunger

Contact element	
1NO+1NC azione rapida  00	
1NO+1NC azione lenta  01	
1NO+1NC lenta sovrapp.  02	
2NO azione lenta  03	
2NC azione lenta  04	
2NC azione rapida  05	
Weight	kg
Pack	pcs


Cable entry				
PG 13,5		M20 x 1,5		
Metal head Plastic body	Metal head Metal body	Metal head Plastic body	Metal head Metal body	Contact travel
E40000AI*	E40000AM*	E40100AI*	E40100AM*	
E40001AI*	E40001AM*	E40101AI*	E40101AM*	
E40002AI	E40002AM	E40102AI	E40102AM	
E40003AI	E40003AM	E40103AI	E40103AM	
E40004AI	E40004AM	E40104AI	E40104AM	
E40005AI	E40005AM	E40105AI	E40105AM	
0,245	0,36	0,245	0,36	
1	1	1	1	

 standard article

* form conforming to EN 50041

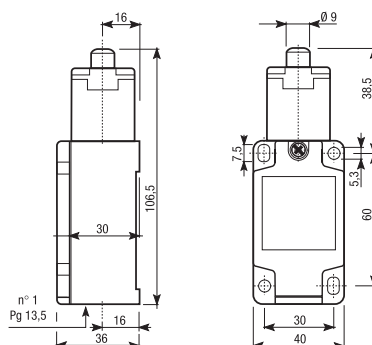

Drive cam operating parameters



V max (m/s) 0,5

Drive forces

Minimum command force 9 N

Minimum forced opening force 28 N